

# Just wet and wind RECTOR HIGH TAPE

**Harden in 30mins**



**TEMP.  
-15~210°C**

## For pipe leakage and breakage

**It solidifies like a metal and  
can be repaired permanently.**

**DRINKING  
WATER LINE  
OK**

**Strong Bond**

## Various uses Please select the size according to location and purpose.



- ◆ Repair for water, air, aux. steam and oil piping in factories & plants.
- ◆ Repair for elevated tank, septic tank, toilet bowl and other tank.
- ◆ Repair for plastic molding machine, construction machine and oil feed pipe.
- ◆ Repair for ship equipments during long voyage.


Approval of Food Sanitation Act No.370/595  
Approval of EPA601 / Approval of AS4020

## Easy work just to wet & wind

Easy to handle, anyone can work quickly and easily.  
It is available for plastic, steel, lead, copper, stainless, concrete, ceramic, glass, PVC and etc.  
Ideal for piping repair of all materials.

### <How to use> ※ Please repair under non-pressure.

- ※ Close the root valve of the piping and hose before repair, and relieve pressure.  
Remove oil, rust and other dirt from the repair spot.  
Please be sure to wear the supplied gloves before work.

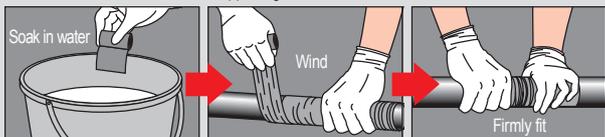

- ① Soak the tape in water (sea water/muddy water) for 20 ~ 30 seconds.
- ② Wind strongly while pulling the tape, and use up all the tape.
- ③ Fit in piping to squeeze the tape, and don't allow air to enter without gaps.
- ④ Bubbles come up from the tape after a while, keep making the tape fit in piping due to loose the tape during bubbling (about 10~15mins). It hardens in 30~40mins at outside temperature 21°C. Wipe by alcohol after completion if required surface finish. It can be sanded and painted also.

- Cover Rector Seal by High Tape for additional strength.
- Cover Arton Tape by High Tape for protection.



You can watch the detailed usage of this product on the video. Please scan the QR code.



- ◆ Chemical resistance  
○=Conformity ×=Non-conformity

20%Acetic acid	○
20%Nitric acid	○
75%Sulfuric acid	○
20%Hydracid	○
Methyl alcohol	○
10%Ammonia	○
Gasoline	○
Kerosene	○
Toluene	○
37%Hydrochloric acid	○
Corn oil	○

## RECTOR HIGH TAPE

**Contents** ● Glass fiber tape (Aluminum packed) ● Rubber gloves ● Pat

	RH-1	RH-2	RH-3	RH-4	RH-5
Size(mm)	W25xL750	W50xL750	W50xL1500	W75xL2700	W100xL4500
Applicable dia.	Under 15A	Under 20A	Under 40A	Under 80A	Under 150A
Material	Glass fiber cloth tape				
Num of turns	6~8 windings				
Hardness	Shore D53				
Temperature	-15~210C				
Pressure	10kg/cm <sup>2</sup>				
JAN code	4560361000058	4560361000065	4560361000072	4560361000089	4560361000095

Usage : Repair and reinforce pipes and hoses for metals, plastics, PVC, FRP, ceramics, glass, rubber.  
Particularly suitable for piping using chemicals and oil.