

# Self fusing silicon tape ARLON TAPE GRAY

Not slippery in water !

TEMP.  
-50~200°C

It's available for Air, Water,  
Sea water, and Aux. steam.

DRINKING  
WATER LINE  
OK

Just wind while  
pulling strongly !



You can stop leakage  
under pressrue !



Width 25mm / 38mm  
Please use according  
to the pipe diameter.



You can watch the detailed  
usage of this product on the video.  
Please scan the QR code.

## ARLON TAPE GRAY

	Product size	Applicable dia.	Qty	JAN code
SRG-2	W 25 x L 2000mm	Under 50A	24	4560361000331
SRG-5	W 25 x L 5000mm	Under 50A	12	4560361000348
SRG-11	W 25 x L 11000mm	Under 50A	6	4560361000355
SRG-38	W 38 x L 6000mm	Under 100A	8	4560361000362

Material	Silicone rubber
Pressure	1.0MPa
Tensile strength	8.0MPa
Temperature	-50°C ~ 200°C
Coefficient of extension	600%

◆ Chemical resistance  
○= Conformity ×= Non-conformity

10%Acetic acid	○
2%Nitric acid	△
10%Sulfuric acid	×
10%Hydracid	○
Acetone	×
Xylol	×
Gasoline	×
Methanol	○
Ethanol	○
Ammonia	△
Antifreeze	○

Approval of Food Sanitation Act No.370/201  
Approval of JIS K6353(Rubber for water)  
US military standard compliant goods (MIL-446852C)


## Arlon Tape Gray repair example

When pulling strongly while winding it, the tapes will self-fuse,  
and they will adhere to broken parts such as piping and hose  
leakage, bleeding, pinholes and gaps.


Repeat to wind the tape until stop.

Since it does not adhere to piping, any material can be repaired.

### Example of leakage repair of pinhole

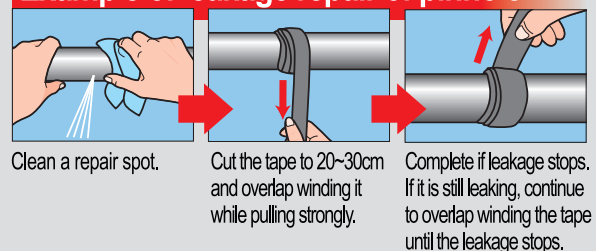

### Example of leakage repair of joint

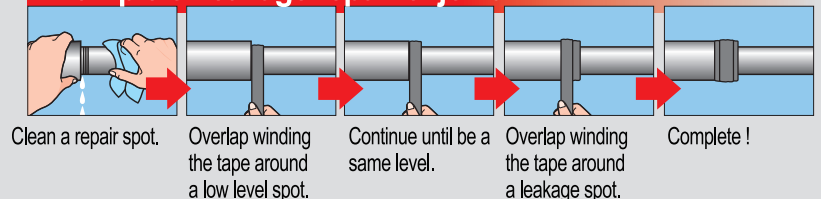

- Press the end of the tape against it while pulling finally.
- Since it done not adhere to piping, the winded tapa can be easily removed with scissors.
- Recommend to combine it with Quick Tape or Rector Seal for protection after completion.
- It can be used in either direction on both sides.